

Fig. 1

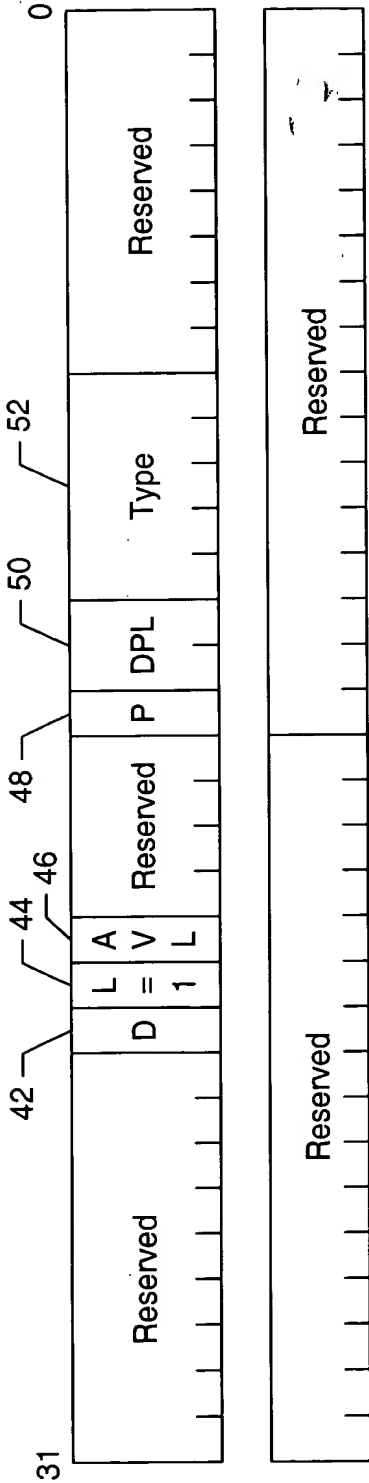


Fig. 2

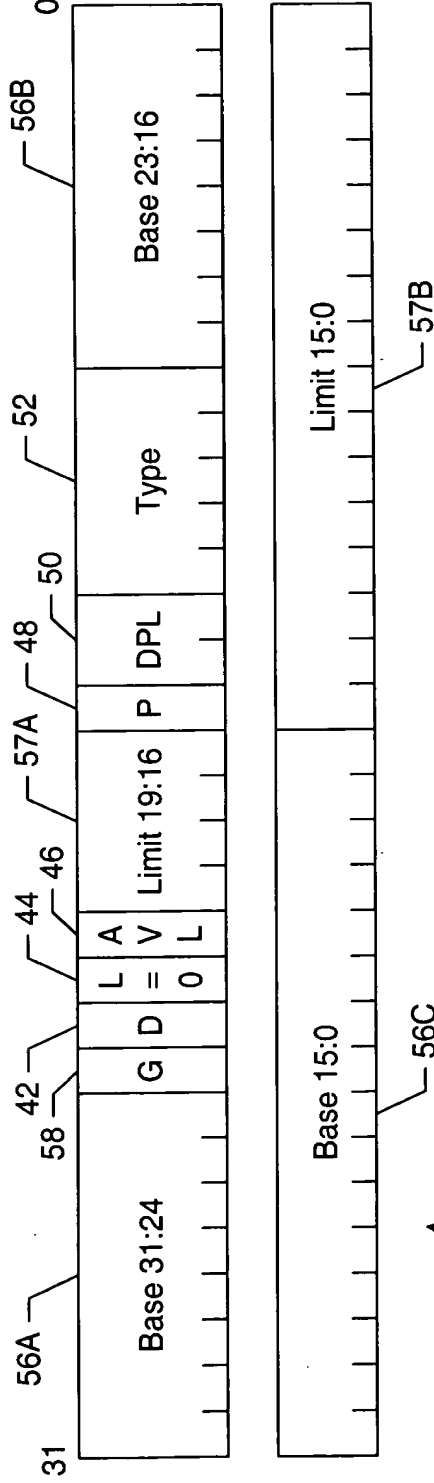


Fig. 3

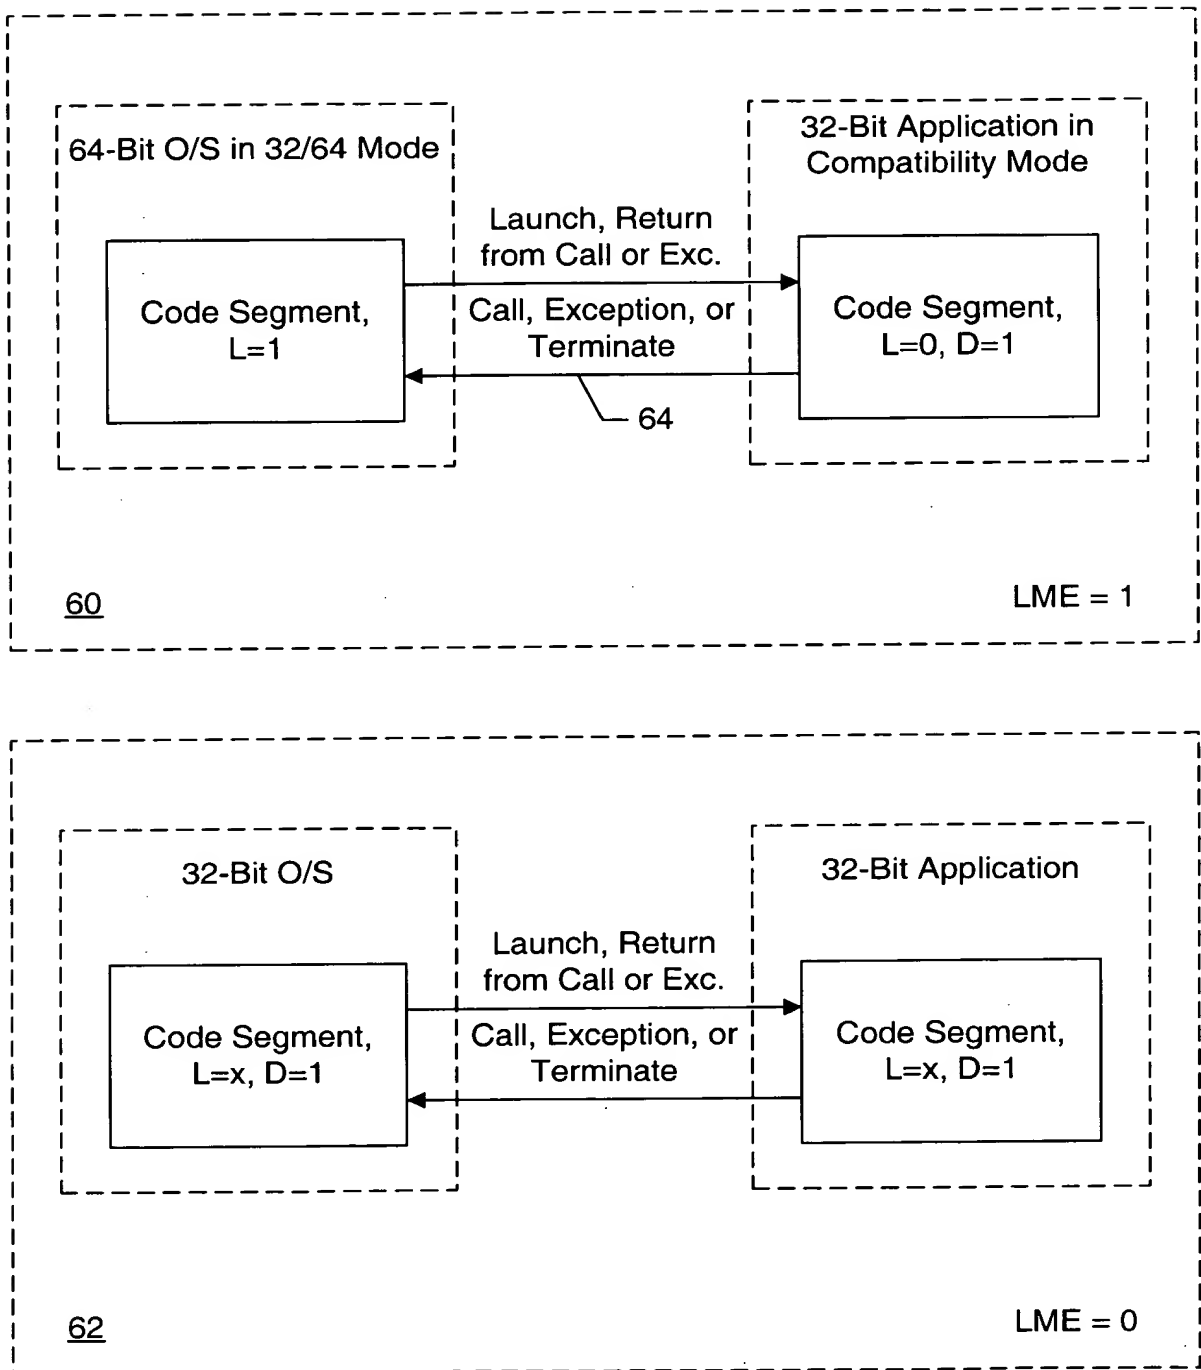


Fig. 4

<u>LME</u>	<u>CS L Bit</u>	<u>CS D Bit</u>	<u>Operating Mode</u>
0	x	0	16 Bit Mode
0	x	1	32 Bit Mode
1	0	0	16 Bit Compatibility Mode
1	0	1	32 Bit Compatibility Mode
1	1	0	32/64 Mode
1	1	1	Reserved

70

Fig. 5

Number of Override Prefixes (66H Operand, 67H Address)		0	1	2+
32/64 Mode	Operand Size	32 bits	64 bits	16 bits
	Address Size	64 bits	32 bits	32 bits
32 Bit Mode Incl. Compatibility Mode	Operand Size	32 bits	16 bits	16 bits
	Address Size	32 bits	16 bits	16 bits
16 Bit Mode Incl. Compatibility Mode	Operand Size	16 bits	32 bits	32 bits
	Address Size	16 bits	32 bits	32 bits

72

Fig. 6

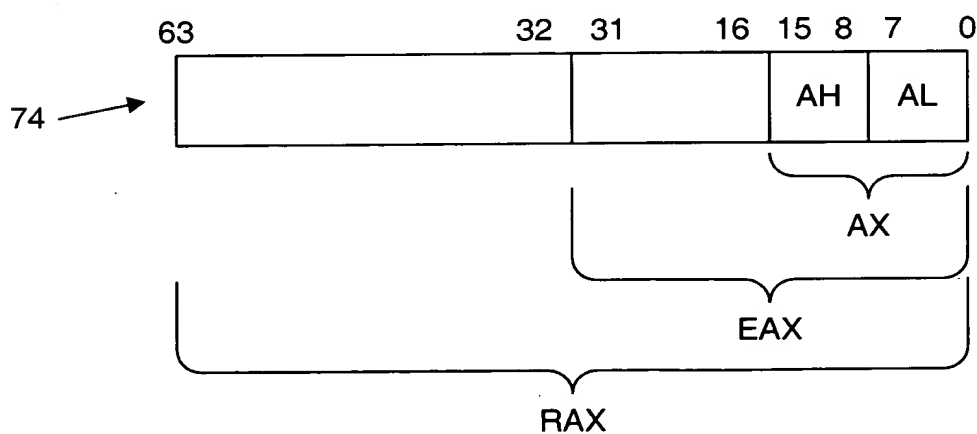


Fig. 7

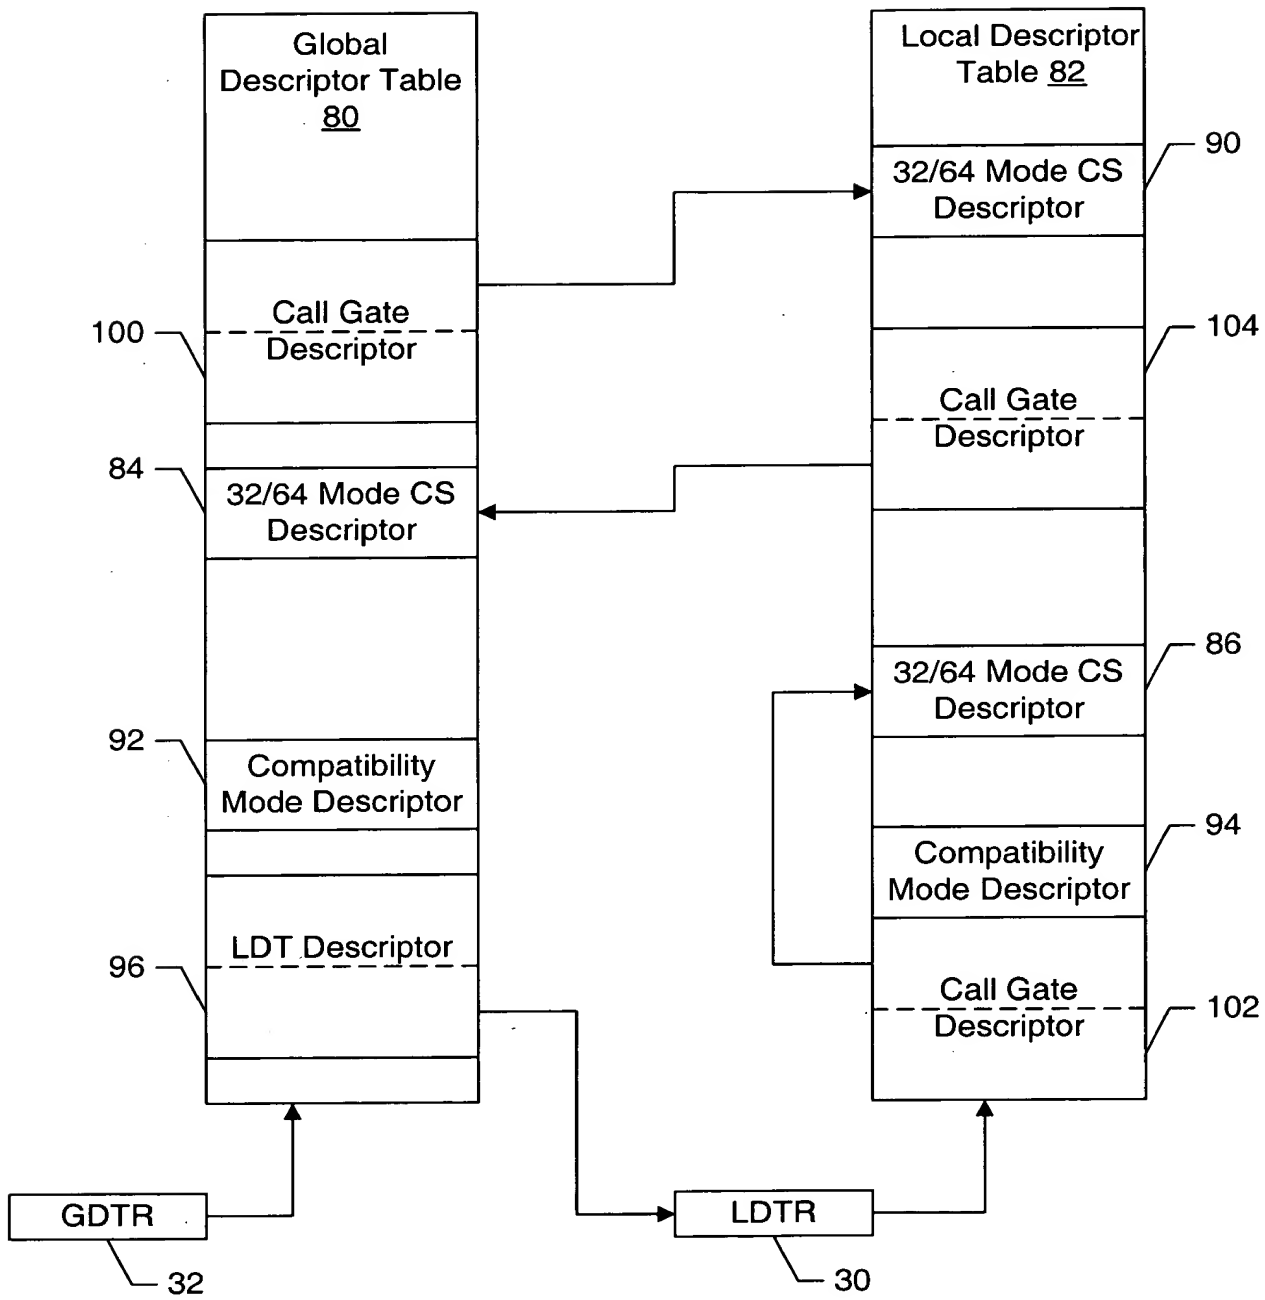


Fig. 8

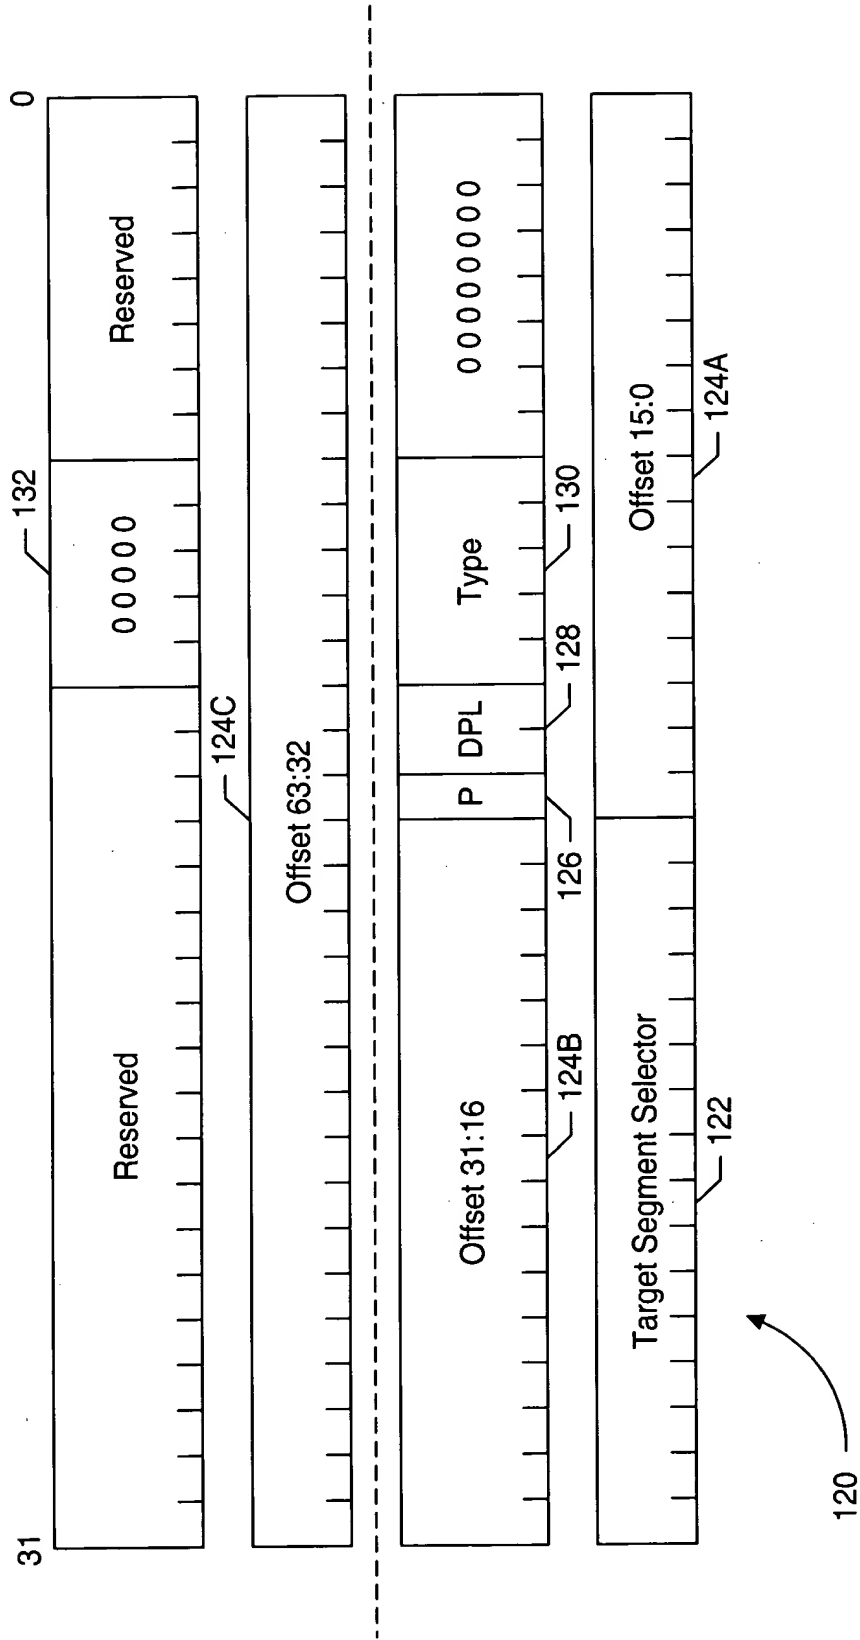


Fig. 9

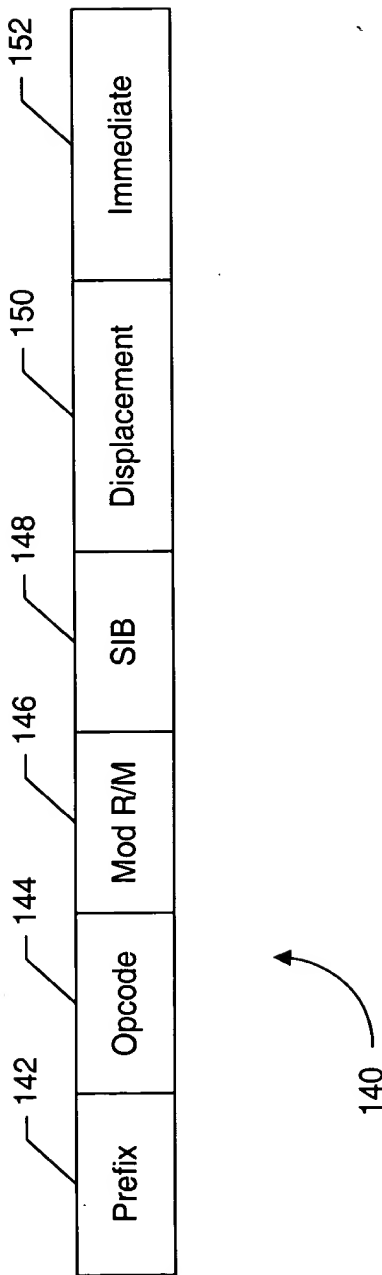


Fig. 10

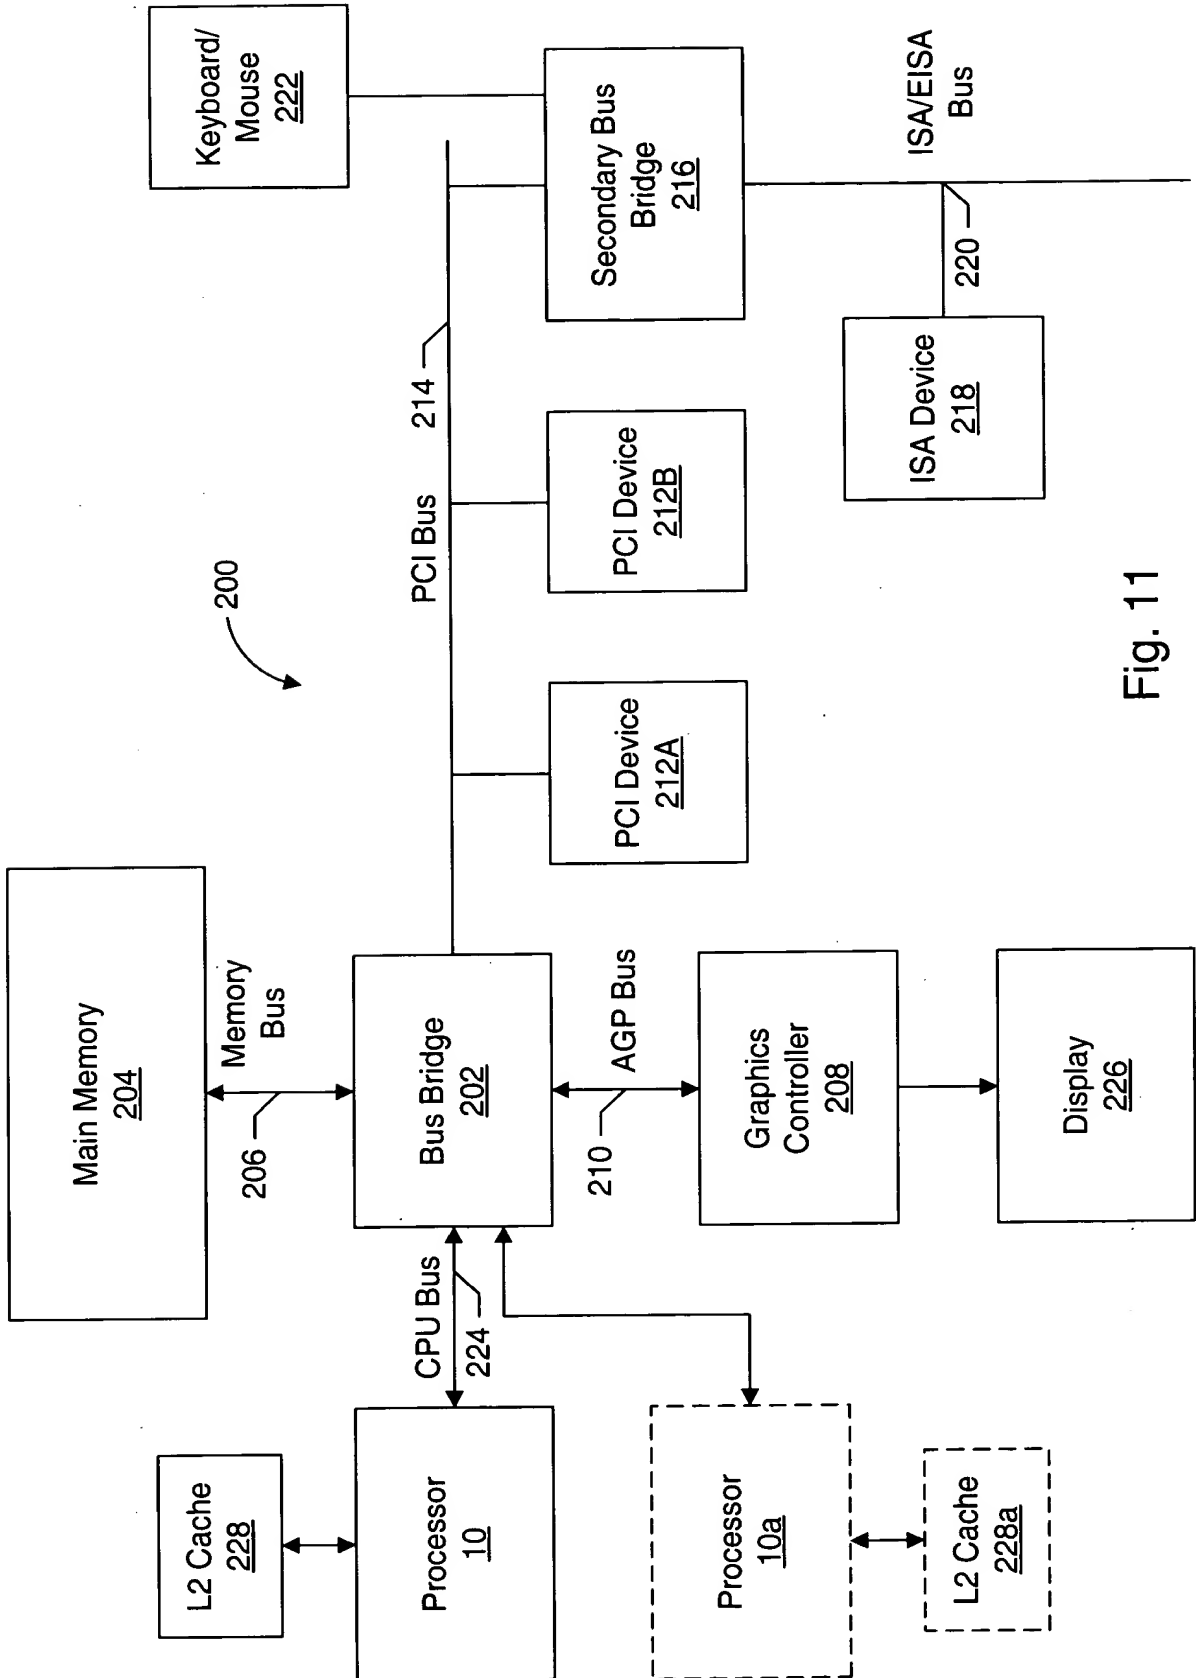


Fig. 11

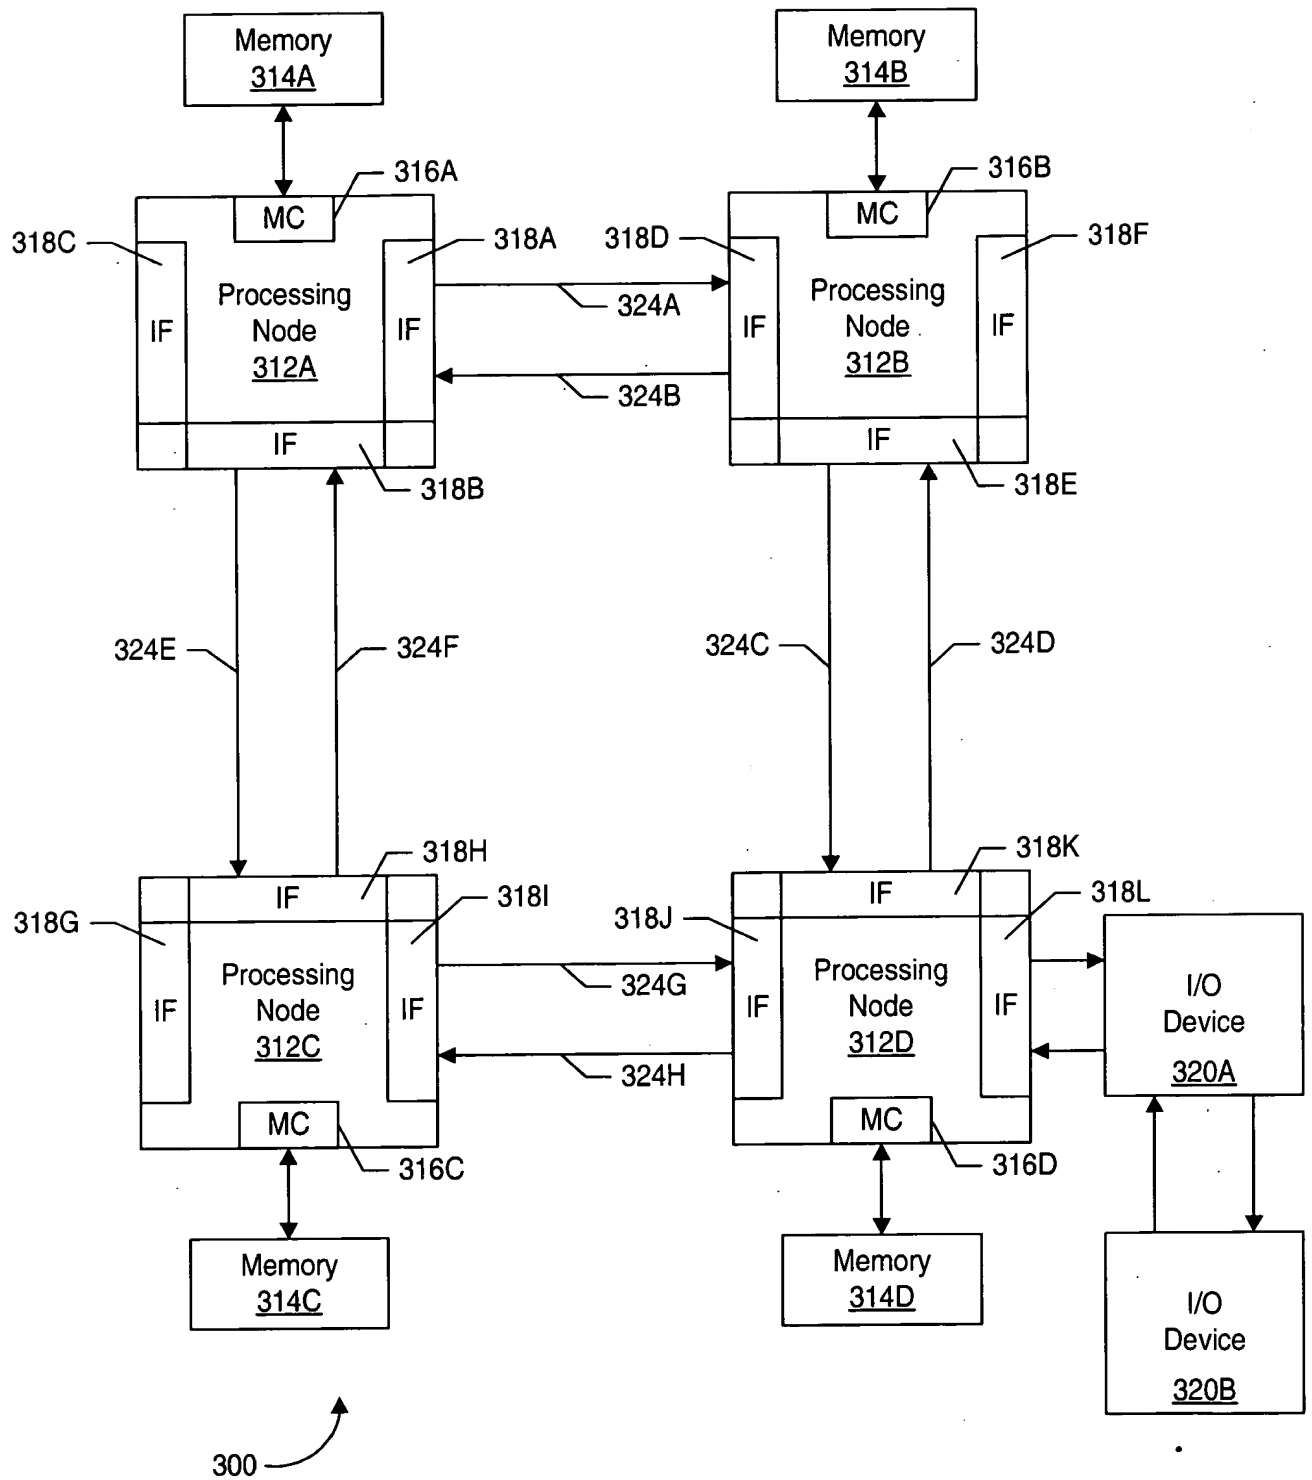


Fig. 12


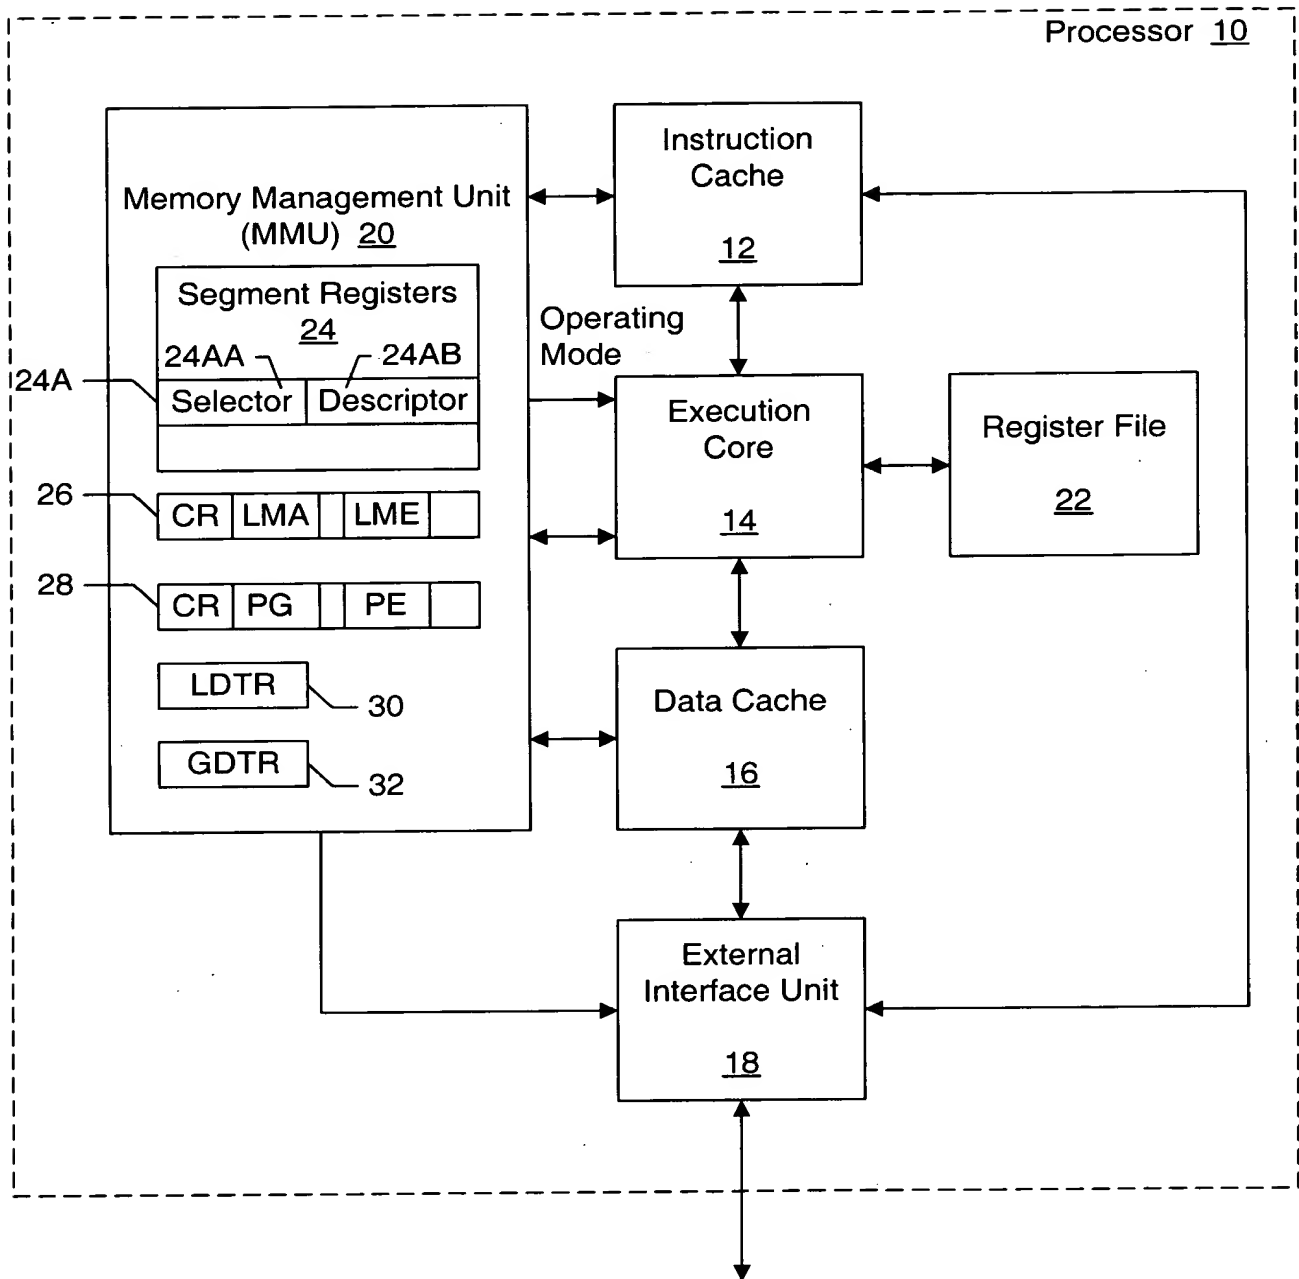


Fig. 13

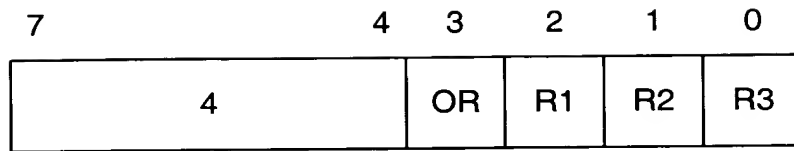


400 

Fig. 14

Patented by the U.S. Patent and Trademark Office

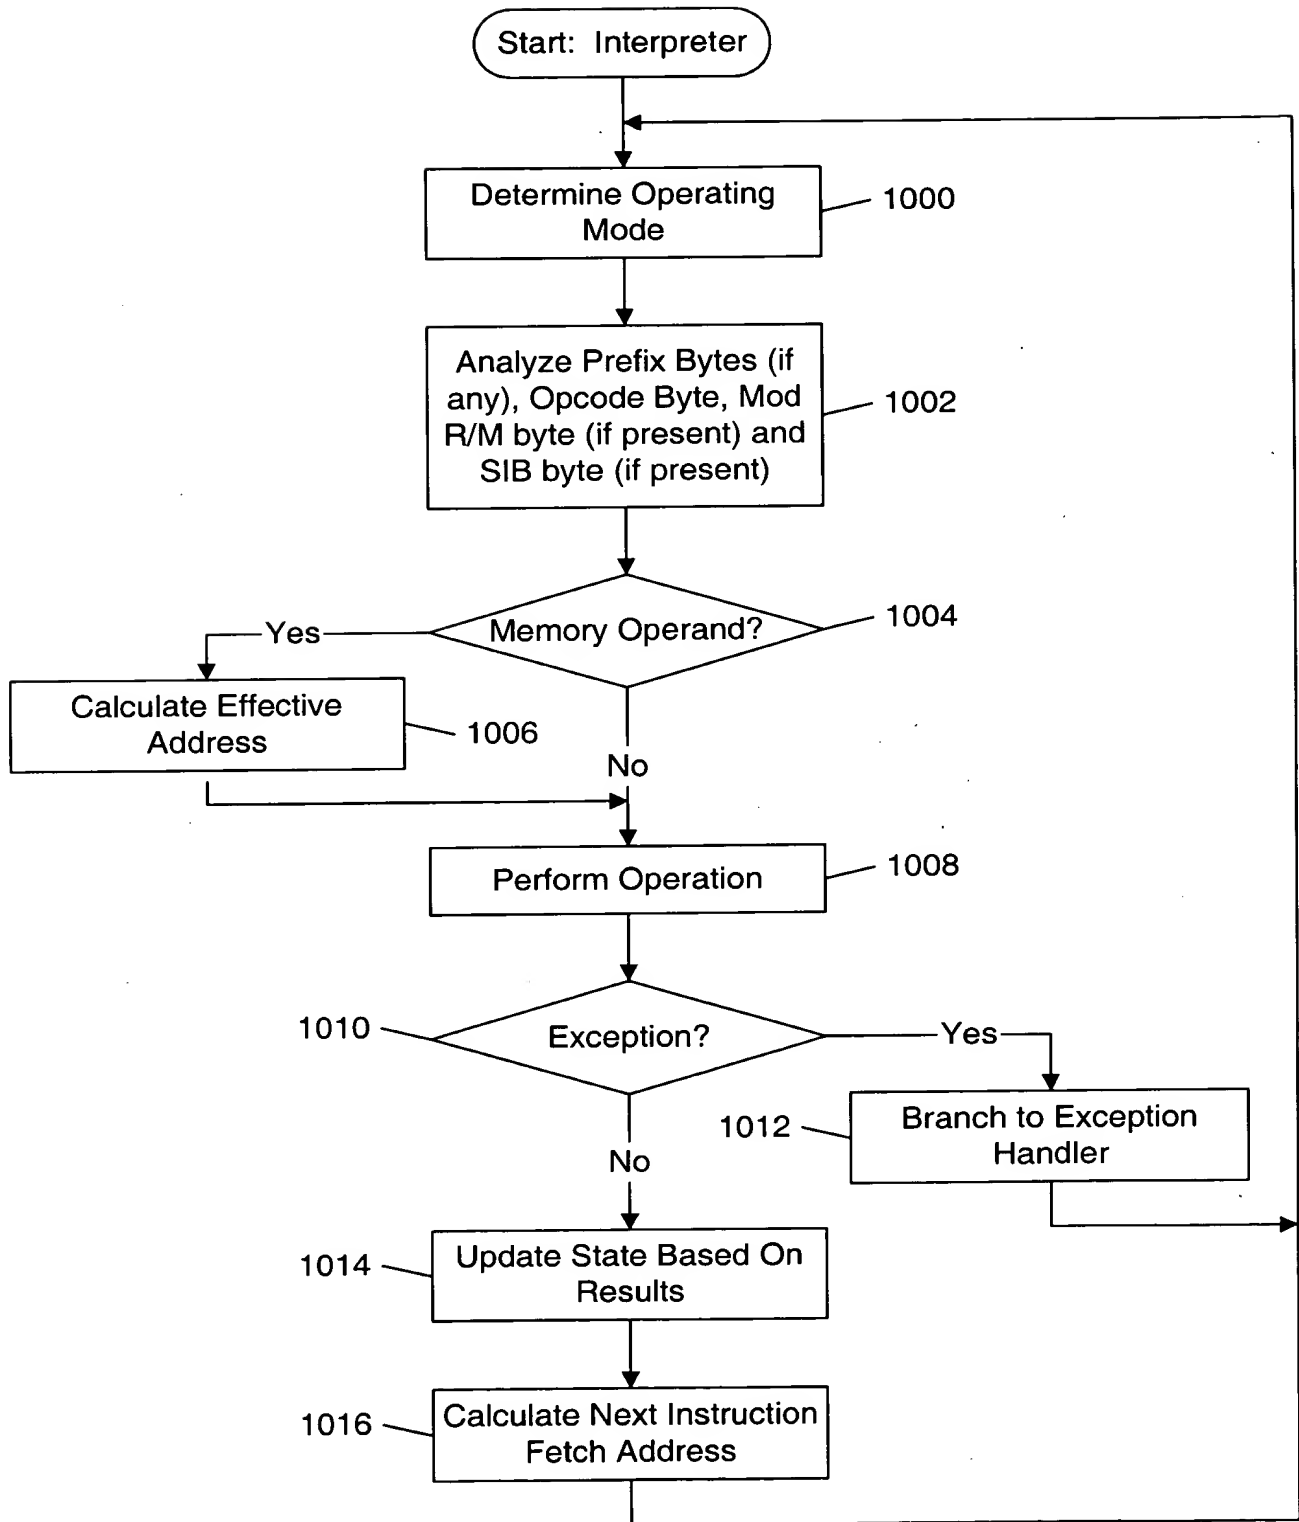


Fig. 15


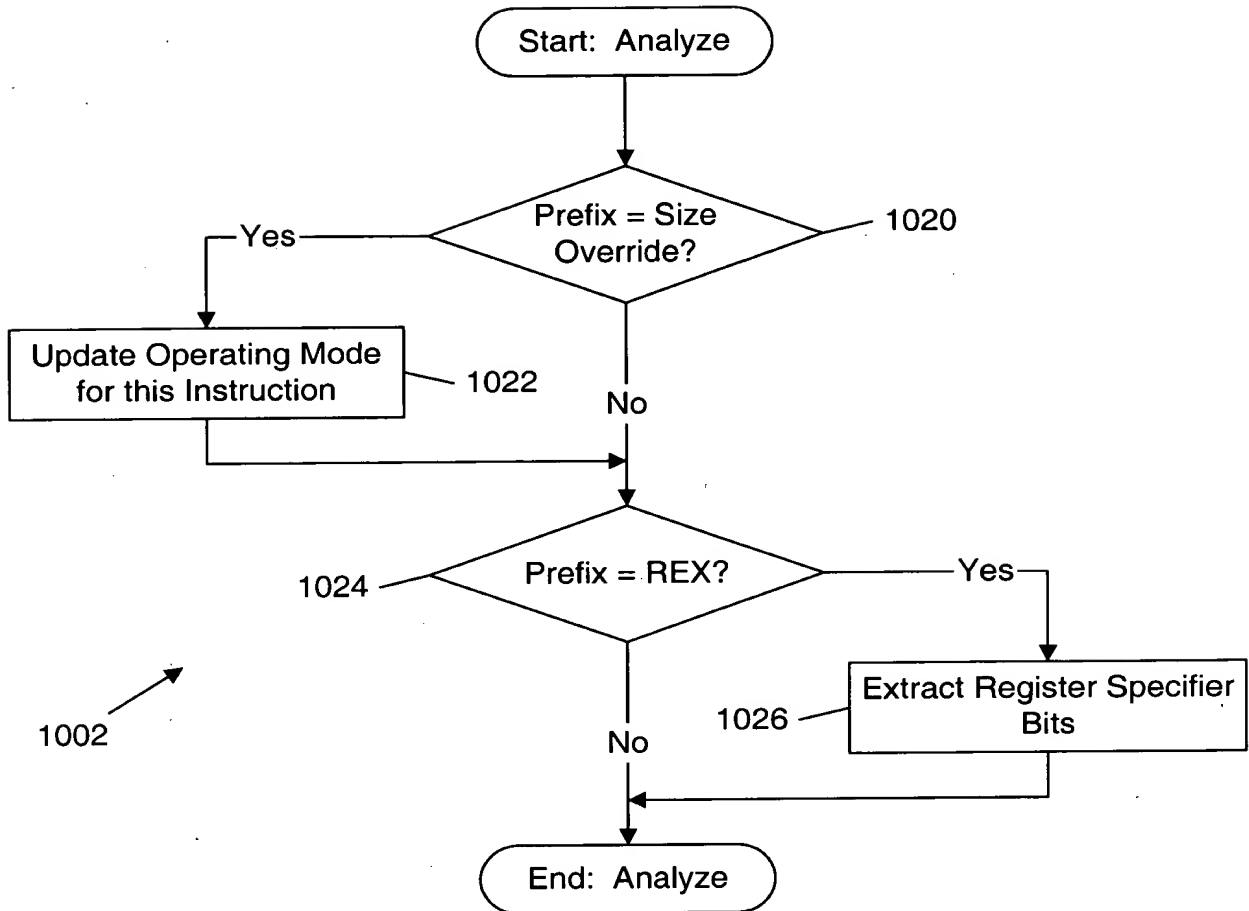


Fig. 16

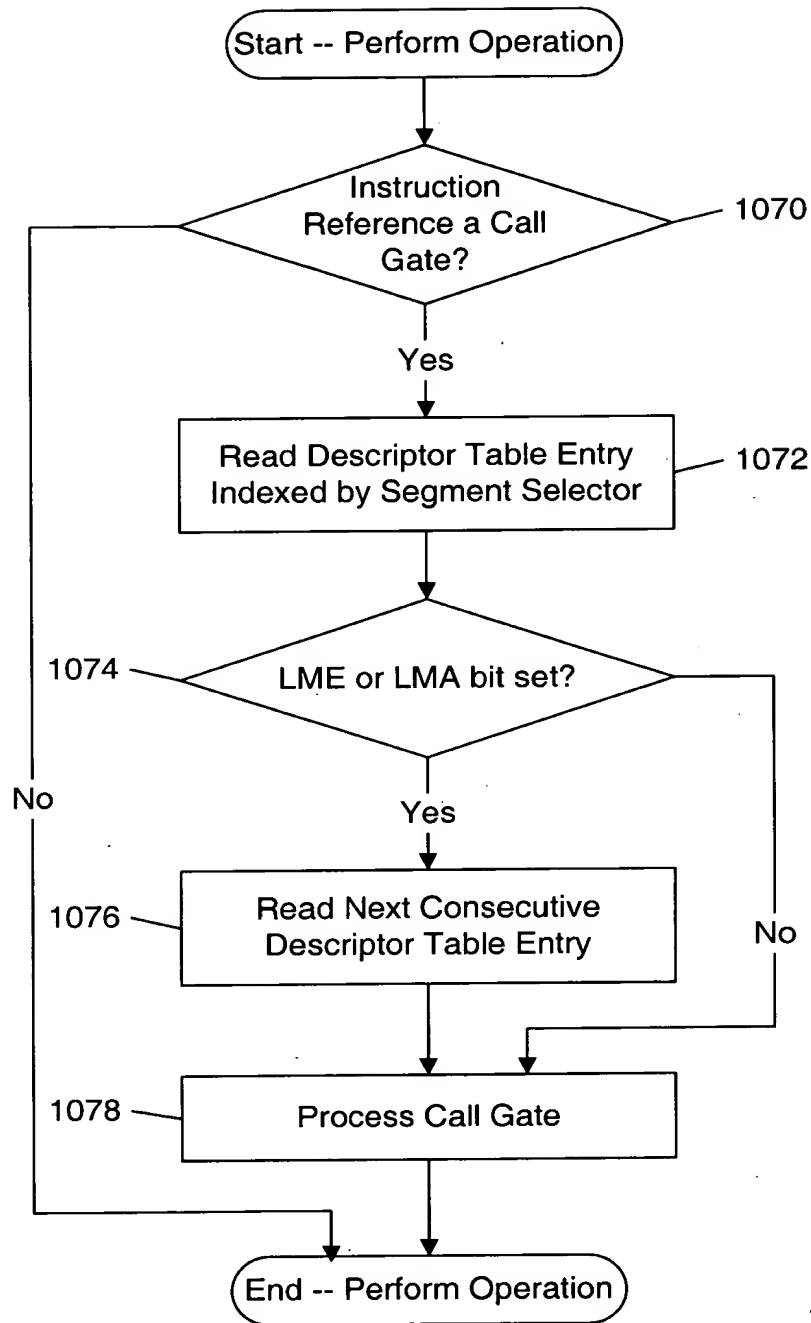

1008

Fig. 17

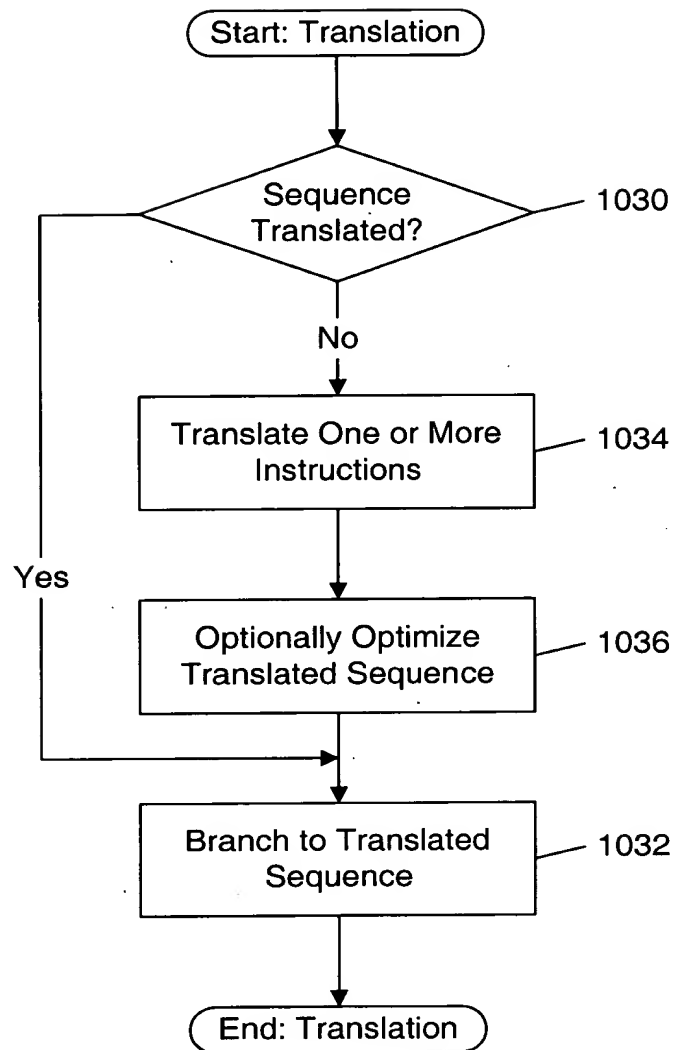


Fig. 18

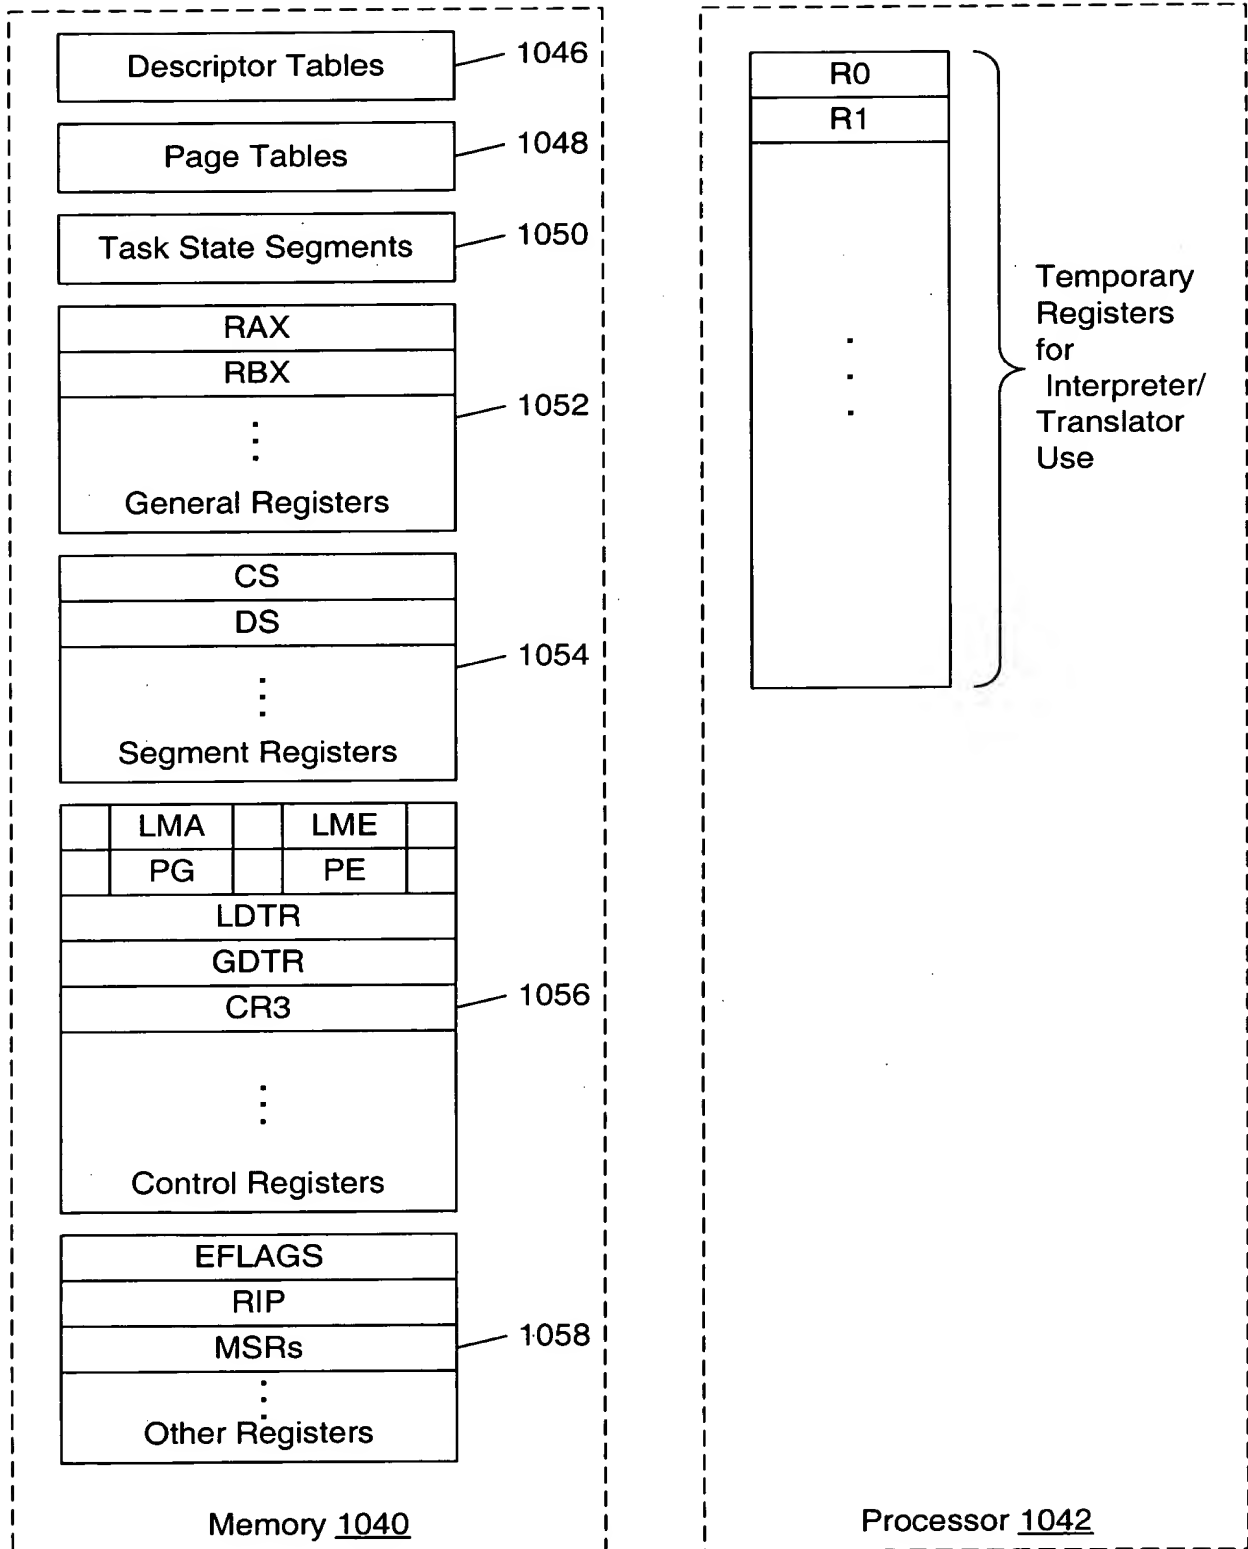


Fig. 19

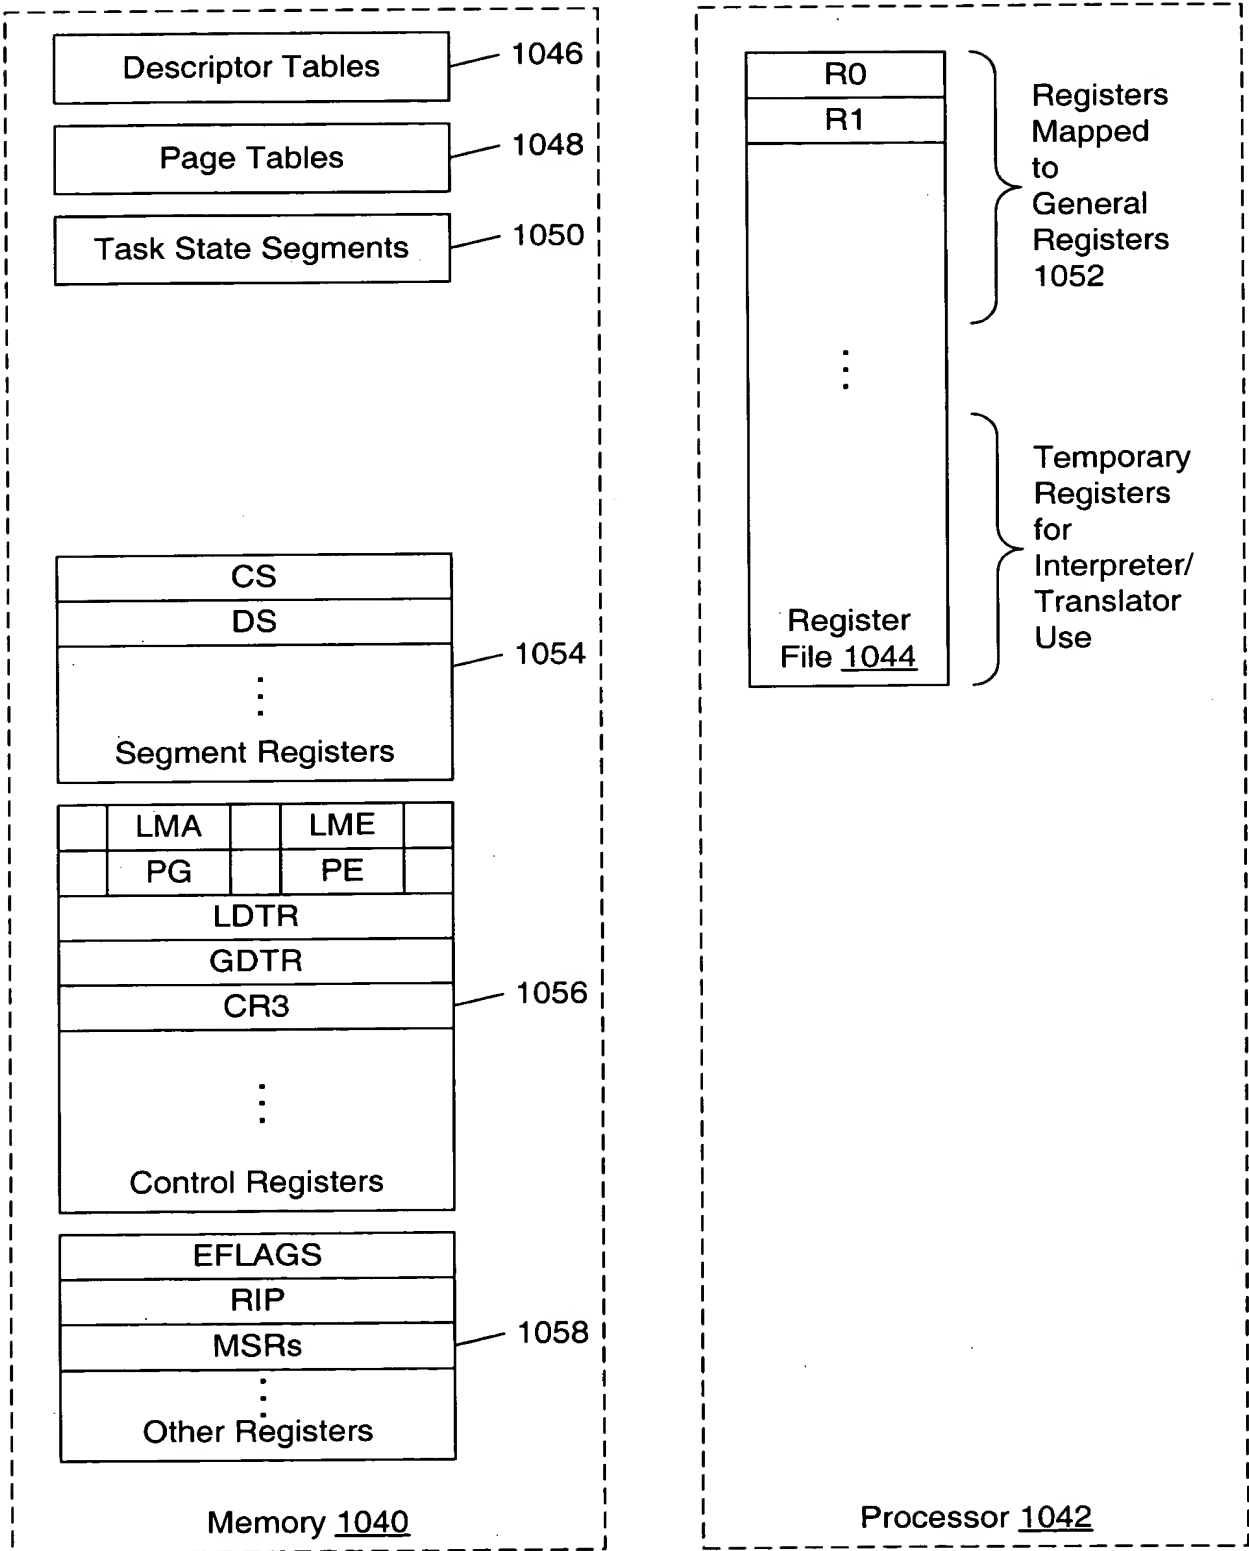


Fig. 20

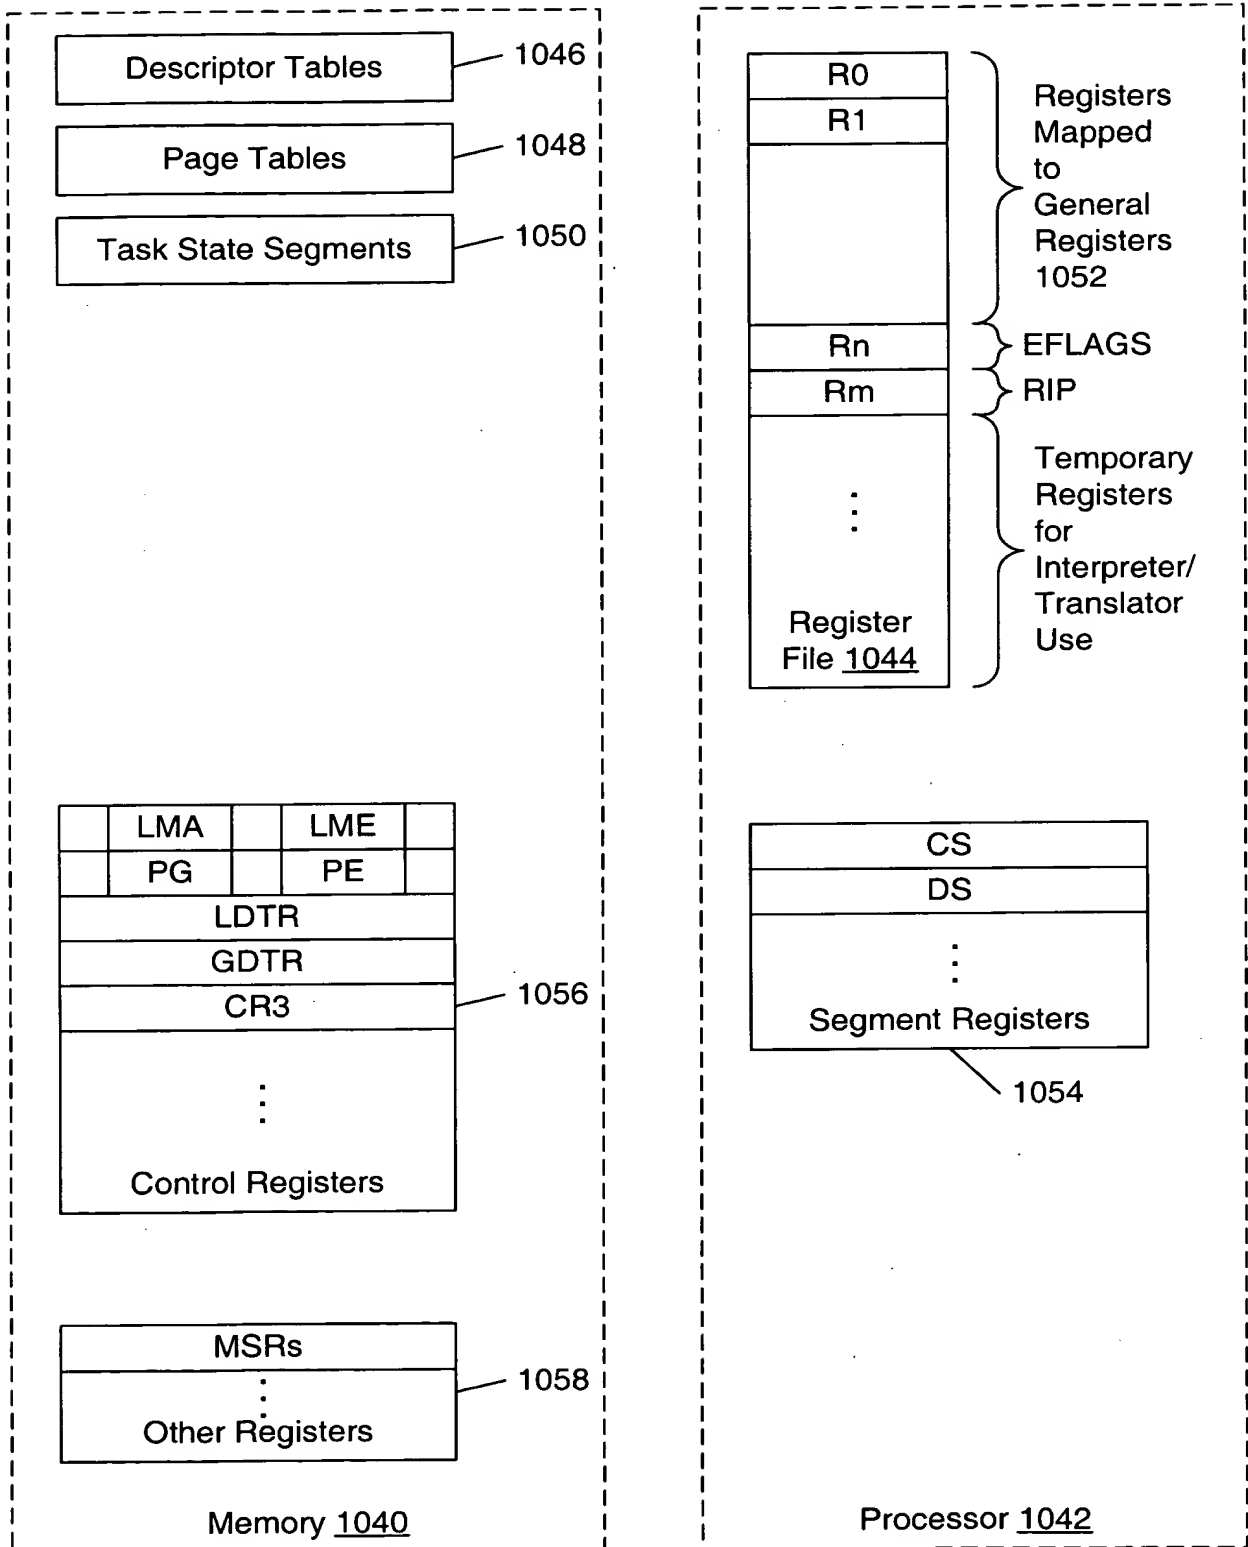


Fig. 21

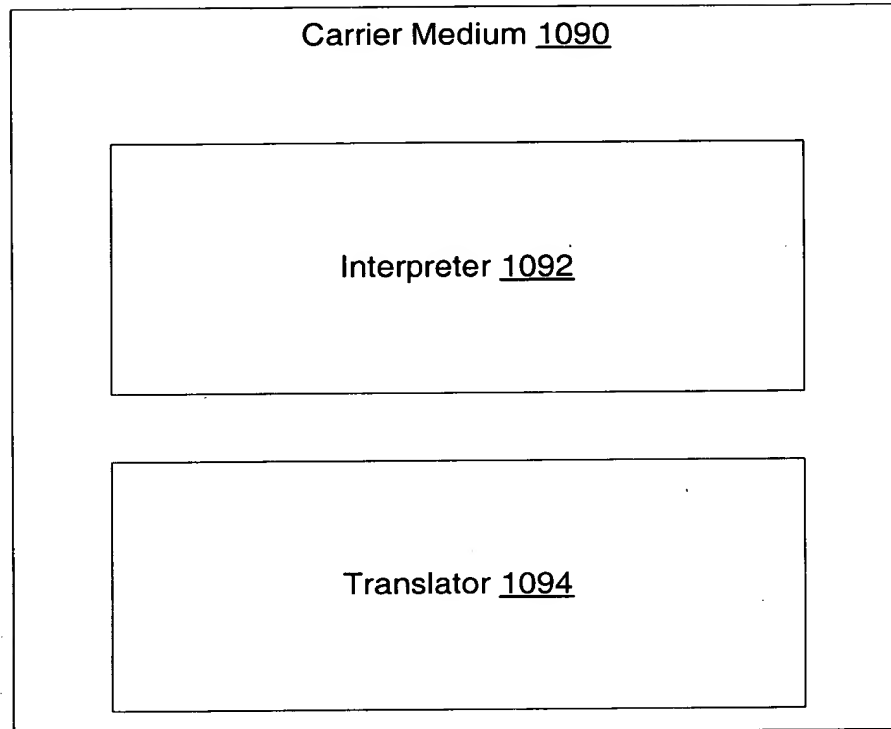


Fig. 22